

CYLINDER HEAD PRESSURE TESTER MACHINE

SHC-130 NAV

**PRESSURE TESTER FOR THE DETECTION
OF CRACKS IN CYLINDER HEADS
COOLING CIRCUITS**

**MINIMUM MAINTENANCE
AUTOMATIC PROGRAMMER FOR HEATING START / STOP TIME
ELECTRONIC TEMPERATURE REGULATOR WITH DIAL DISPLAY
EASY CLAMPING DEVICE WITH 360° TURNING SYSTEM
EASY EMPTYING AND CLEANING OF THE DRUM
THERMOINSULATED STAINLESS STEEL CASK FOR LOW CONSUMPTION**



toningtec

TECHNICAL FEATURES


		<i>SHC 130 NAV</i>
Maximum stroke	mm	1070
Rotation speed	r.p.m.	4
Heating power	kw	2 x 4,5
Stroke hydraulic power	kw	1,1
Turning power	kw	1,1
Voltage		220 / 380 V 3 PH + N + E
Frequency	Hz	50 - 60
Manoeuvre voltage		24 V A C
Total power	kw	24
Machine dimensions	mm	Length: 2300 Width: 1100 Height: 2900
Machine net weight	kg	600
Maximum unit capacity (with 360° rotation)	mm	Length: 1300 Width: 800 Height: 500
Maximum weight piece	kg	500
Water capacity	l	2100
Time to heat from ambient temperature	min	210
Package dimensions	mm	

STANDARD ACCESSORIES

Transparent plate 300X240X30
 Transparent plate 400X400X30
 Transparent plate 800X800X30
 4 Cable tiers for fix the upper part
 4 Flat supports for fix the lower part
 8 M16 x 650 mm threaded rod
 8 M16 x 480 mm threaded rod
 8 M16 Washers
 6 Male pneumatic coupling ref. 90872010 Legris
 3 25 l bottle of PROSAL DLS

SPECIAL ACCESSORIES

If the client want, special clamping tools can be manufactured.

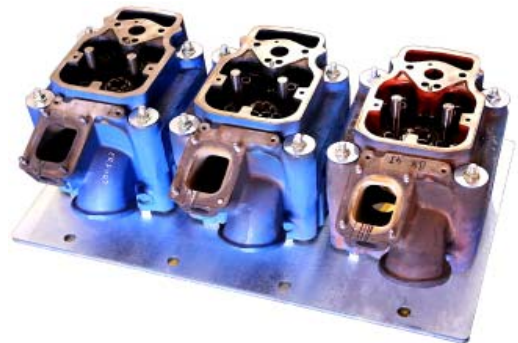

NOTE : We reserve the right to change specifications without prior warning.



HONINGTEC, S.A.

C/ Sant Jaume, 8-14
 08550 HOSTALETS DE BALENYÀ
 Barcelona (España)
 Tel. 34-93 889 84 10 / 34-93 889 80 44
 Fax 34-93 889 82 76
 E-mail: honingtec@honingtec.com
<http://www.honingtec.com>

DISTRIBUTOR